

HAPPY HUMAN WARRANTY



SoundTools products are built to endure even the harshest live sound and audio environments. We are so confident in the reliability of our SoundTools products that every unit is covered by the Happy Human Warranty. If for any reason you're unhappy with any of your SoundTools products, simply return it to the place of purchase in its original packaging within one year for a full refund, no questions asked.

SoundTools road-tests all products for lifelong durability. If you experience any unhappiness after the one year warranty then we will happily replace your SoundTools product with a new or reconditioned unit, for life.

For warranty help, please contact your local dealer, email us at support@soundtools.com, or visit soundtools.com/support-warranty.html


THANK YOU!

We hope you enjoy your new SoundTools Mic Swapper, a 2-IN, 2-OUT Microphone-channel swapper.

One of our main goals here at SoundTools is to create useful and quality tools for every SoundHuman's toolbox. If you ever have questions or want to share a cool way you've been using your SoundTools product, feel free to reach out!

We'd love to see your product in action! Tag us and don't forget to #SoundTools

@RatSoundTools



CONTACT US



486 CONSTITUTION AVE
CAMARILLO, CA 93012



SUPPORT@SOUNDTOOLS.COM



(805) 383 -0777



SOUNDTOOLS.COM

MIC SWAPPER STARTER GUIDE


Made For And By Sound Humans

Step 1:

Connect 2 microphones or 2 line level outputs to the Mic Swapper XLR female connectors


Step 2:

Connect the 2 Mic Swapper XLR male connectors to 2 XLR mic level or XLR line level inputs

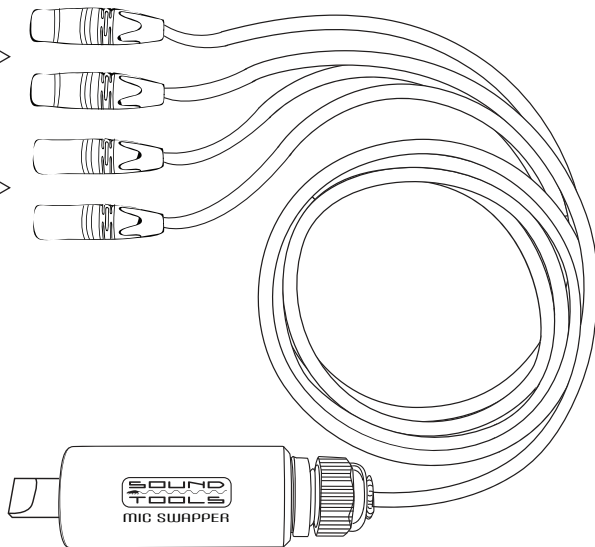

Step 3:

Use the switch to swap outputs



- With the switch in the **A1-B2** position, input A will connect to output 1 and input B will connect to output 2
- With the switch in the **A2-B1** position, input A will connect to output 2 and input B will connect to output 1

* The Mic Swapper is reversible and can be used to swap inputs or outputs at mic or line level